

Product Data Sheet

FRIS1000

Product Overview

- **Lining:** Nylon, Spandex/Lycra
- **Dip Material:** Polyurethane, Nitrile
- **Dipping Style:** Micro Foam
- **Touch Screen:** Yes
- **Food Contact:** No
- **Cuff Style:** Knit Wrist
- **Gauge:** 15
- **MSDS:** N/A



Applications

- General handling
- Small metal parts handling
- Plastic handling
- Precision assembly
- Engineering
- Technical applications
- Automotive industry
- Construction
- Logistics and warehouse use
- Mining

Size Details

Code	Size	Hem Colour	Standards & Certifications
FRIS1000-06	XSmall	White	  
FRIS1000-07	Small	Red	
FRIS1000-08	Medium	Black	
FRIS1000-09	Large	Green	
FRIS1000-10	XLarge	Yellow	
FRIS1000-11	2XLarge	Blue	
FRIS1000-12	3XLarge	Brown	

How to Store

Store in a cool, dry area away from direct sunlight.
Keep covered to keep away dust.

Warranty

Limited lifetime covering manufacturing defects.

Care and Cleaning Instructions

Gentle machine washable. Don't exceed 30°C. Don't bleach. Rinse in cold or warm water. Avoid tumble dry, ironing, or direct sunlight to dry.

Packaging

Hangcard: 1 Pair
Polybag: 12 Pairs
Carton: 120 Pairs

Size Specifications as per standard EN ISO 21240

Glove Size	7	8	9	10	11
Palm Circumference	178mm	203mm	229mm	254mm	279mm
Hand Length	171mm	182mm	192mm	204mm	215mm
Standard Glove Sizes	S/7	M/8	L/9	XL/10	2XL/11


EN 388:2016



AS/NZS 2161.3 Occupational Protective Gloves
Part 3: Protection Against Mechanical Risk
Based on EN388 - Protective gloves against mechanical risks.

4 1 3 1 X

	Rating
Abrasion Resistance	1-4
Cut Resistance (Coupe Test)	1-5
Tear Resistance	1-4
Puncture Resistance	1-4
Cut Resistance (ISO 13997)	A - F
Impact Protection (P or no rating)	P

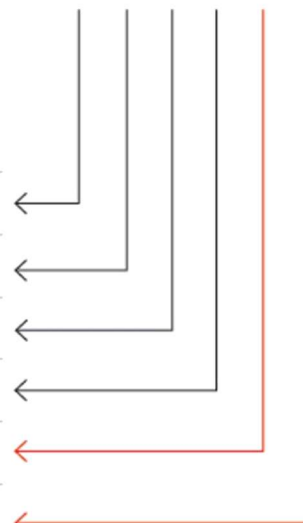

EN388:2016+A1:2018	LVL 1	LVL 2	LVL 3	LVL 4	LVL5
Abrasion resistance (cycles)	100	500	2000	8000	N/A
Cut Resistance (index)	1.2	2.5	5	10	20
Tear Resistance	10	25	50	75	N/A
Puncture Resistance	20	60	100	150	N/A

EN ISO 13997:1999 TDM	LVL A	LVL B	LVL C	LVL D	LVL E	LVL F
Cut resistance test level (N)	2	5	10	15	22	30
EN388:2016+A1:2018 Impact Test	P (Pass)		F (Fail)		X	
Average Transmittance Force (KG)	≤7KG		≥9KG		Not Tested	